

NK-550VR

FULLY HYDRAULIC TRUCK CRANE

【SPECIFICATION】

■ CRANE

Description	Truck crane with maximum lifting capacity 55 ton
Model	NK-550VR

● Specification

Maximum rated lifting capacity	11.0 m Boom	55,000 kg × 3.0 m (Parts of line : 14)
	11.0 m Boom	40,000 kg × 3.5 m (Parts of line : 10)
	15.0 m Boom	28,000 kg × 5.0 m (Parts of line : 8)
	19.0 m Boom	28,000 kg × 5.0 m (Parts of line : 8)
	23.0 m Boom	24,000 kg × 6.0 m (Parts of line : 6)
	27.0 m Boom	20,000 kg × 6.5 m (Parts of line : 5)
	35.0 m Boom	14,000 kg × 8.0 m (Parts of line : 4)
	43.0 m Boom	8,000 kg × 10.0 m (Parts of line : 4)
	9.2 m Jib	3,500 kg × 80° (Parts of line : 1)
	15.0 m Jib	2,500 kg × 80° (Parts of line : 1)
	Rooster	4,000 kg (Parts of line : 1)
Boom length	11.0 m — 43.0 m	
Fly jib length	9.2 m, 15.0 m	
Maximum lifting height	43.0 m (Boom) 58.0 m (Jib)	
Hoisting line speed	Main winch	114 m/min. (at 3rd layer)
	Auxiliary winch	105 m/min. (at 2nd layer)
Hoisting hook speed	Main winch	(part of line; 14) : 8.1 m/min. (at 3rd layer)
	Auxiliary winch	(part of line; 1) : 105 m/min. (at 2nd layer)
Boom derricking angle	-2.5° — 81°	
Boom derricking time	70 sec. (-2.5° — 81°)	
Boom extending time	170 sec. (11.0 m — 43.0 m)	
Slewing speed	1.85 min ⁻¹	
Tail slewing radius	3,480 mm	

● Equipment and structure

Boom type	Box-shaped, 5-section hydraulically telescopic type (boom sections 2/3 and 4/5 simultaneously operated)	
Jib type	2 sections (2nd section of draw-out type, 3-step inclination type (offset angles 5°, 25° and 45°))	
Boom extension/retraction equipment	Three hydraulic cylinders and wire ropes used together	
Boom derricking/lowering equipment	One hydraulic cylinder of direct acting type with pressure-compensated flow control valve	
Winch system	Driven by axial plunger type hoisting motor through planetary gear reduction.	
Main & Auxiliary winches	Controlled independently by operating lever. Equipped with automatic brake.	
Slewing equipment	Ball bearing type	
Wire rope for hoisting	Main winch	Diameter : 18 mm × Length : 235 m
	Auxiliary winch	Diameter : 18 mm × Length : 125 m

● Hydraulic equipment

Oil pump	4 section gear type	
Hydraulic motor	Hoisting motor	Axial plunger type
	Slewing motor	Axial plunger type
Control valve	3 position 4 way double acting with integral check and relief valves	
Cylinder	Double acting type	
Oil reservoir capacity	695 L	

● Safety devices

ACS (Automatic crane stopper), Boom falling prevention device, Winch hoisting limiter, Winch drum lock device, Winch drum turning indicator, Automatic winch brake, Irregular winding prevention device, Hydraulic safety valve, Outrigger lock device, Joystick control safety stop system, Slewing lock device

● Standard equipment

Front jack, Fly jib, Rooster sheave, Independent two winches control system, Irregular winding prevention device, Winch automatic brake, Sub hook sheave for 55t Hooks (40 ton, 20 ton, 4 ton), Hydraulic oil cooler, Full size fender, Large size steps, 3 working lights, Moment limiter with voice alarm, Winch drum turning indicator, Sun visor, Cigar lighter, Ashtray, Cab floor mat, Tool kit

● Optional equipment

Winch over-unwinding device, Winch drum mirror (hoist mirror), Yellow ray light, Cab heater, Cab cooler, Fan, Radio AM FM, Fire extinguisher, Roof visor

■ CARRIER

FAW CA5425JQZ

Maker and model FAW CA5425JQZ

● Specification

Maximum traveling speed	70 km/h
Gradeability	30% (theoretical value)
Minimum turning radius	11.75 m

● General dimensions & G.V.W.

Overall length	approx. 13,370 mm
Overall width	approx. 2,800 mm
Overall height	approx. 3,780 mm
Wheel base	1,450 mm + 3,900 mm + 1,350 mm = 6,700 mm

Treads	Front	2,282 mm
	Rear	2,059 mm
Outriggers	Type	Hydraulic H-beam type (with float and vertical cylinder in single unit)
	Extension	7,000 mm (Fully extended)
	Width	4,800 mm (Intermediately extended) 2,500 mm (Fully retracted)
Gross machine weight	Gross weight	approx. 41,600 kg
	Front weight	approx. 15,650 kg
	Rear weight	approx. 25,950 kg

● Engine

Model	CA6DL2-35E3 (EURO-III)
Type	6-inline, 4 cycle, direct injection water cooled, diesel
Piston displacement	8.6 L
Max. power	258 kW/ 2,100 min ⁻¹ (350 PS/ 2,100 min ⁻¹)
Max. torque	1500N.m/ 1600 min ⁻¹

● Equipment and structure

Drive system	8 × 4	
Clutch	Single dry plate, hydraulic control with air booster	
Transmission	Manual transmission type	
Number of speeds	9 forward & 1 reverse speed	
Axles	Front	Reverse "ELLIOT" type
	Rear	Full floating type with hub reduction
Suspension	Front	Leaf springs with shock absorber
	Rear	Equalizer beams & torque rods with leaf springs (with lockout device)
Brake	Service	2 circuit air brake, 8 wheels internal expanding type
	Parking	Spring loaded brake
	Auxiliary	Exhaust brake
Steering	Type	Ball nut type with power booster
Tire size	Front	315 / 80R 22.5
	Rear	315 / 80R 22.5
Fuel tank capacity	380 L	
Seating capacity	2 persons	
Battery	(12V-6-QAW-180) × 2	

● Standard equipment

Towing hook (front and rear, eye type), Spare tire & wheel, Air dryer, Radio AM FM with cassette deck, Cigar lighter, Ashtray, Cab heater, Cab cooler

- Stow the hooks in place before traveling.
- Before you use this machine, read the precautions in the instruction manual thoroughly to operate it correctly.
- KATO products and specifications are subject to improvements and changes without notice.

RATED LIFTING CAPACITY

Based on ISO 4305

11.0 m — 43.0 m Boom

(Unit : Metric ton)

Outriggers fully extended with front jack - 360° full range								
Outriggers fully extended without front jack - over side and over rear								
Working radius (m)	11.0m Boom	15.0m Boom	19.0m Boom	23.0m Boom	27.0m Boom	35.0m Boom	43.0m Boom	
3.0	55.00	40.00	28.00	28.00	24.00			
3.5	43.70	40.00	28.00	28.00	24.00			
4.0	38.50	38.50	28.00	28.00	24.00	20.00		
4.5	34.20	34.20	28.00	28.00	24.00	20.00		
5.0	30.80	30.80	28.00	28.00	24.00	20.00		
5.5	27.80	27.80	27.40	27.20	24.00	20.00	14.00	
6.0	25.40	25.40	25.00	24.80	24.00	20.00	14.00	
6.5	23.20	23.20	22.80	22.60	22.50	20.00	14.00	8.00
7.0	21.40	21.40	21.00	20.80	20.60	19.60	14.00	8.00
7.5	19.70	19.70	19.30	19.10	19.00	18.00	14.00	8.00
8.0	17.90	17.90	17.75	17.50	17.30	17.25	14.00	8.00
8.5	16.20	16.20	15.90	15.70	15.50	15.45	13.80	8.00
9.0	14.60	14.60	14.40	14.15	14.00	13.90	13.60	8.00
10.0			11.90	11.65	11.50	11.45	12.30	8.00
11.0			10.00	9.75	9.60	9.50	10.40	7.80
12.0			8.40	8.15	8.10	8.00	8.85	7.10
13.0			7.15	6.90	6.80	6.75	7.55	6.65
14.0				5.90	5.80	5.75	6.50	6.15
16.0				4.30	4.20	4.10	4.95	5.35
18.0					3.00	2.95	3.75	4.20
20.0					2.10	2.05	2.80	3.30
22.0						1.30	2.10	2.55
24.0						0.75	1.50	2.00
26.0							1.05	1.50
28.0							0.65	1.05
30.0								0.70
31.0								0.50
Standard hook	for 40 ton + sub hook sheave	for 40 ton				for 20 ton		
Hook mass	450 + 150 kg	450 kg				320 kg		
Parts of line	14	10	8	8	6	5	4	4
Critical boom angle	—	—	—	—	—	—	33°	40°

421-75103000

(Unit : Metric ton)

Outriggers intermediately extended without front jack - 360° full range							
Outriggers fully extended without front jack - over front							
Working radius (m)	11.0m Boom	15.0m Boom	19.0m Boom	23.0m Boom	27.0m Boom	35.0m Boom	43.0m Boom
3.0	32.00	28.00	28.00	24.00			
3.5	32.00	28.00	28.00	24.00			
4.0	32.00	28.00	28.00	24.00	20.00		
4.5	29.00	28.00	28.00	24.00	20.00		
5.0	22.00	21.90	21.50	21.40	20.00	14.00	
5.5	17.30	17.20	16.90	16.80	16.70	14.00	
6.0	14.10	14.00	13.70	13.60	13.50	14.00	8.00
6.5	11.80	11.65	11.35	11.30	11.20	12.30	8.00
7.0	10.00	9.85	9.55	9.50	9.45	10.45	8.00
7.5	8.55	8.40	8.15	8.10	8.05	9.00	8.00
8.0	7.40	7.25	7.00	6.95	6.90	7.85	8.00
9.0	5.70	5.55	5.30	5.25	5.20	6.05	6.50
10.0		4.25	4.00	3.90	3.85	4.75	5.20
11.0		3.20	2.95	2.90	2.80	3.70	4.20
12.0		2.40	2.20	2.10	2.05	2.90	3.40
13.0		1.80	1.55	1.45	1.40	2.25	2.70
14.0						1.70	2.15
15.0							1.70
Standard hook	for 40 ton				for 20 ton		
Hook mass	450 kg				320 kg		
Parts of line	8	8	8	6	5	4	4
Critical boom angle	—	—	35°	48°	58°	64°	68°

421-75104000

43 m Boom + 9.2 m Jib

43 m Boom + 15 m Jib

(Unit : Metric ton)

Outriggers fully extended with front jack - 360° full range													
Outriggers fully extended without front jack - over side and over rear													
43m Boom + 9.2m Jib							43m Boom + 15m Jib						
Boom angle (°)	Offset 5°		Offset 25°		Offset 45°		Boom angle (°)	Offset 5°		Offset 25°		Offset 45°	
	Working radius (m)	Load (t)	Working radius (m)	Load (t)	Working radius (m)	Load (t)		Working radius (m)	Load (t)	Working radius (m)	Load (t)	Working radius (m)	Load (t)
81.0	10.00	3.50	12.75	2.30	14.60	1.25	81.0	11.75	2.50	16.20	1.20	19.40	0.70
80.0	11.05	3.50	13.70	2.30	15.45	1.25	80.0	12.95	2.50	17.20	1.20	20.35	0.69
79.0	12.05	3.48	14.65	2.30	16.30	1.24	79.0	14.10	2.49	18.15	1.19	21.25	0.69
78.0	13.00	3.40	15.60	2.25	17.20	1.23	78.0	15.10	2.45	19.10	1.17	22.15	0.68
77.0	13.90	3.23	16.50	2.19	18.05	1.21	77.0	16.20	2.30	20.10	1.15	23.05	0.67
76.0	14.85	3.04	17.40	2.12	18.90	1.19	76.0	17.25	2.17	21.10	1.12	24.00	0.67
75.0	15.75	2.90	18.25	2.06	19.75	1.17	75.0	18.25	2.06	22.15	1.10	24.85	0.65
74.0	16.70	2.75	19.15	1.99	20.55	1.16	74.0	19.20	1.95	23.15	1.07	25.70	0.64
72.0	18.50	2.49	20.90	1.85	22.25	1.12	72.0	21.10	1.76	25.05	1.02	27.45	0.62
70.0	20.15	2.28	22.60	1.73	23.90	1.09	70.0	23.00	1.59	26.80	0.97	29.10	0.61
68.0	21.85	2.09	24.20	1.62	25.40	1.06	68.0	24.90	1.47	28.60	0.93	30.65	0.59
66.0	23.55	1.91	25.80	1.53	26.85	1.04	66.0	26.75	1.35	30.30	0.90	32.25	0.58
64.0	25.05	1.68	27.40	1.43	28.35	1.02	64.0	28.60	1.24	32.00	0.87	33.80	0.57
62.0	26.55	1.41	28.85	1.24	29.85	1.00	62.0	30.40	1.10	33.70	0.84	35.30	0.56
60.0	28.00	1.13	30.20	1.00	31.15	0.85	60.0	32.00	0.87	35.25	0.72	36.75	0.55
59.0	28.75	1.00	30.85	0.89	31.80	0.77	59.0	32.80	0.76	36.00	0.66	37.45	0.55
58.0	29.45	0.86	31.50	0.77	32.45	0.69	58.0	33.60	0.64	36.60	0.58	38.20	0.54
57.0	30.20	0.73	32.20	0.66	33.05	0.61							
56.0	30.85	0.63	32.85	0.56	33.70	0.53							
Standard hook	for 4 ton						Standard hook	for 4 ton					
Hook mass	120 kg						Hook mass	120 kg					
Parts of line	1						Parts of line	1					
Critical boom angle	55°						Critical boom angle	57°					

421-75105000

43 m Boom + 9.2 m Jib

43 m Boom + 15 m Jib

(Unit : Metric ton)


Outriggers intermediately extended without front jack - 360° full range													
Outriggers fully extended without front jack - over front													
43m Boom + 9.2m Jib							43m Boom + 15m Jib						
Boom angle (°)	Offset 5°		Offset 25°		Offset 45°		Boom angle (°)	Offset 5°		Offset 25°		Offset 45°	
	Working radius (m)	Load (t)	Working radius (m)	Load (t)	Working radius (m)	Load (t)		Working radius (m)	Load (t)	Working radius (m)	Load (t)	Working radius (m)	Load (t)
81.0	10.00	3.50	12.75	2.30	14.60	1.25	81.0	11.75	2.50	16.20	1.20	19.40	0.70
80.0	11.05	3.50	13.70	2.30	15.45	1.25	80.0	12.95	2.50	17.20	1.20	20.35	0.69
79.0	12.05	3.42	14.65	2.30	16.30	1.24	79.0	14.10	2.49	18.15	1.19	21.25	0.69
78.0	12.90	3.05	15.60	2.25	17.20	1.23	78.0	15.10	2.45	19.10	1.17	22.15	0.68
77.0	13.65	2.67	16.45	2.06	18.05	1.21	77.0	16.05	2.06	20.10	1.15	23.05	0.67
76.0	14.50	2.27	17.20	1.76	18.90	1.19							
Standard hook	for 4 ton						Standard hook	for 4 ton					
Hook mass	120 kg						Hook mass	120 kg					
Parts of line	1						Parts of line	1					
Critical boom angle	75°						Critical boom angle	76°					

421-75106000

(Unit : Metric ton)

Outriggers fully retracted (blocked on vertical cyls.) - 360° full range	
Working radius (m)	11.0 m Boom
3.0	8.00
3.5	6.40
4.0	5.10
4.5	4.20
5.0	3.40
5.5	2.80
6.0	2.30
6.5	1.90
7.0	1.60
7.5	1.25
8.0	1.00
Standard hook	for 40 ton
Hook mass	450 kg
Parts of line	10


WORKING RANGE

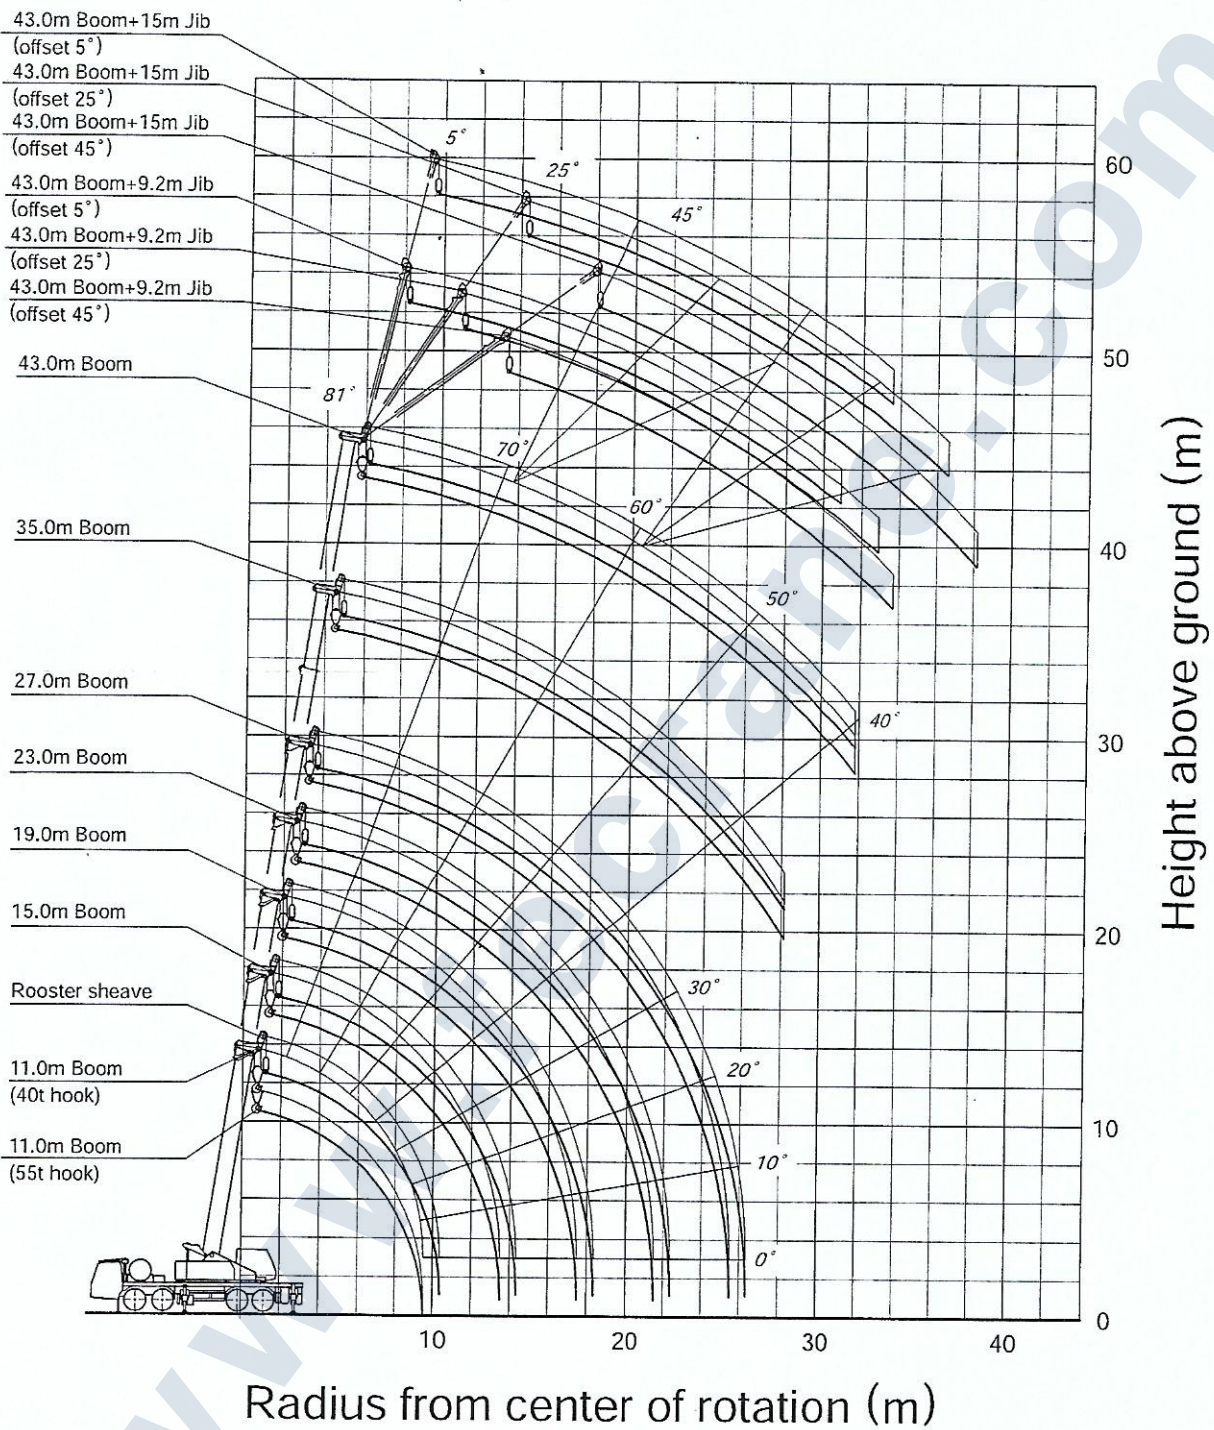


Note: Deflection of boom and jib is excluded

Minimum path width


● Right turn

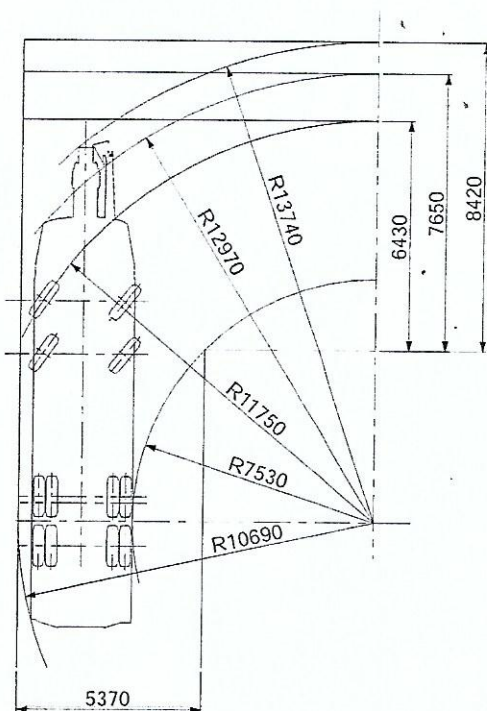




● Left turn

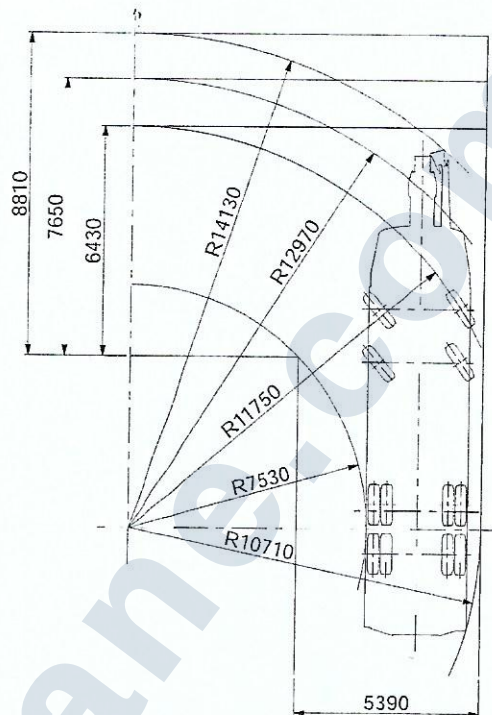

Overall view

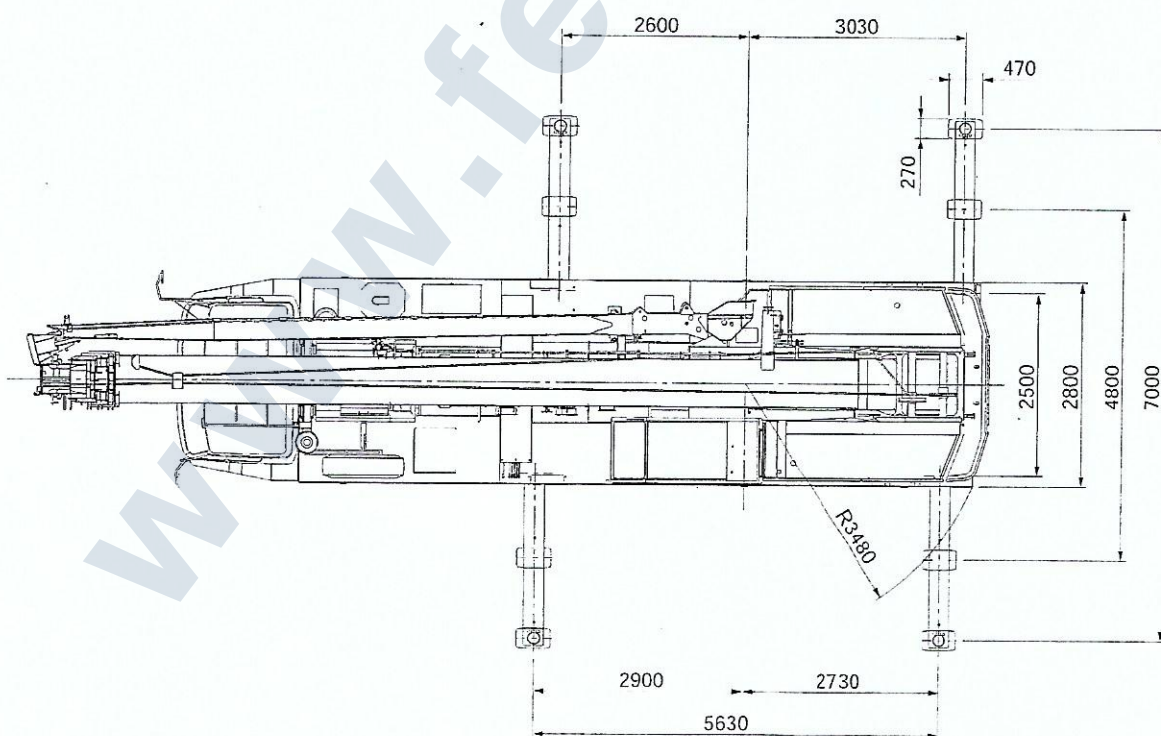

Overall view

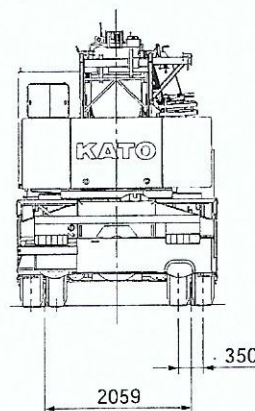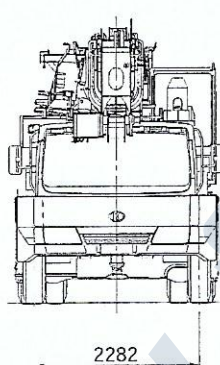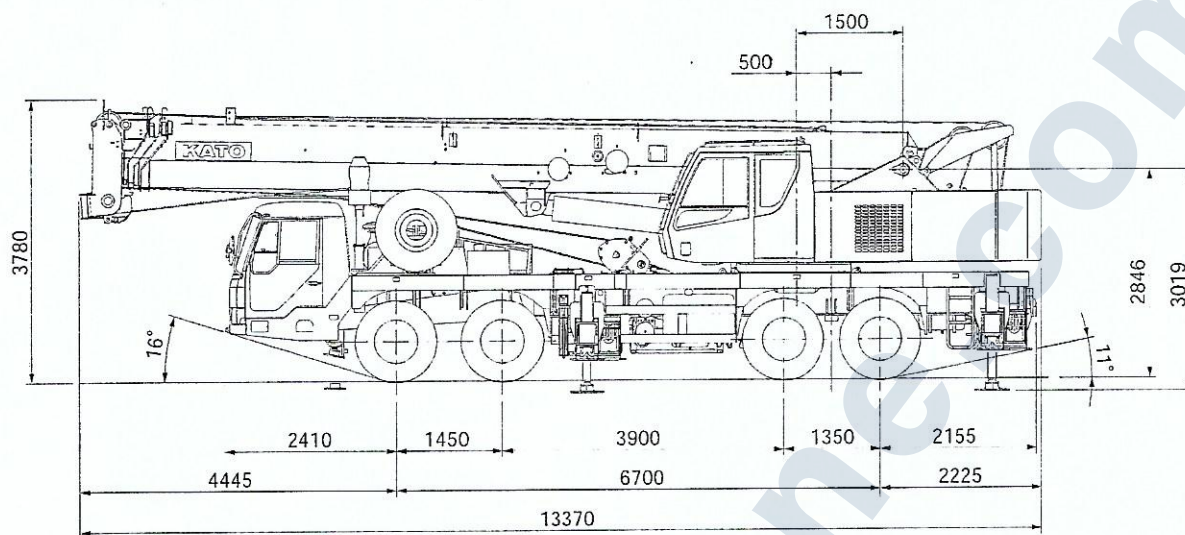

Reduced scale : 1/100 Unit (mm)

* KATO products and specifications are subject to improvements and changes without notice.

Address inquiries to:

KATO KATO WORKS CO.,LTD.

9-37, Higashi-ohi 1-chome, Shinagawa-ku, Tokyo, 140-0011, Japan

Tel. : Head Office Tokyo (03) 3458-1111

Overseas Marketing Department. Tokyo (03) 3458-1115

Fax. : Tokyo (03) 3458-1163

URL <http://www.kato-works.co.jp>